

# Professional CCTV 19" LCD Display




**RoHS Compliance**

- Crisp picture performance
- High resolution, high contrast ratio
- Stylish and portable design
- NTSC/PAL auto mode
- Universal power supply (VESA DPMS compatible)
- Multiple mechanical design for various installation
- User friendly one level operation in OSD
- 7 language OSD control
- NTSC/PAL 3D Comb filter compatible
- Strengthen glass (Option)
- 3D comb filter compatible with NTSC/PAL/SECAM

### Stand Base (-5°~40°)

Standard Plate With Patent Tilt Adjustment  
-5°~40° is Designed for Different Viewing Angles of Various Applications.

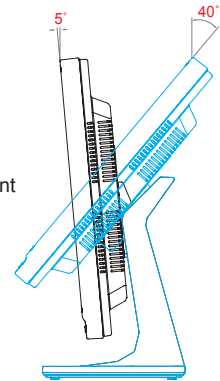



MODEL	LPL-19W01
LCD Display	19" Active Matrix TFT LCD Panel
Pixel pitch	1280(H) × 1024(V) SXGA
Max. Resolution	500TVL
Scan Freq. Horizontal	31.5KHz~80KHz
Vertical	56~75Hz
Contrast	550:1
Brightness	400cd/m <sup>2</sup> (Typ.)
Response Time Tr / Tf	5.6/2.4ms
Display Color	16.2M
Viewing Angle L/R	70°(H) / 70°(V)
Viewing Angle Up/Down	75° / 60°
Lamp Life Time	50,000hrs(Typ.)
Display Mode	VGA, Video & S-Video
Signal Connector	VGA In, BNC In/Out, Y/C In/Out, Audio In/Out
Front Control Panel Buttons	Power on / off / Mode / Auto, Up ( Contrast Adjust ), Down ( Brightness Adjust ), Menu.
OSD Menu (VGA)	Brightness, Contrast, H-Position, V-Position, Clock, Phase, Color Temp, User Color R, User Color G, User Color B, OSD H-Pos, OSD V-Pos, Volume, Language, Recall.
(Video)	Color, Tint ( NTSC only ), Brightness, Contrast, Sharpness, Volume, Language, Color Temp, Recall.
Power Input	DC Input: 12V / 4.16A, 50 / 60Hz.
Operating Condition	Temperature: 0°C~ 40°C, Humidity: 20% ~ 85%.
Storage Condition	Temperature: -20°C~ 60°C, Humidity: 20% ~ 85%.
Power Consumption	40W (Max.)
Dimension	424 ( W ) x 419 ( H ) x 170 ( D )mm
Optional Signal Connector	DVI In, Order Ref. : LPL-19D01

Specification subject to change without notice.


### Optional Accessories



Rack Mounting Bracket

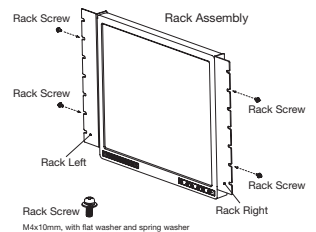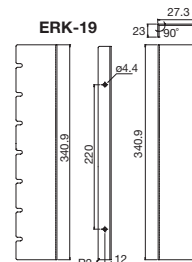

### DW-170 (Three knuckles for adjusting)

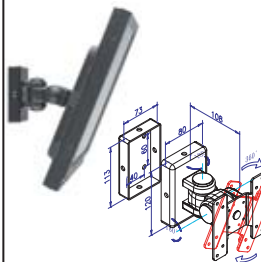

### DW-171 (Two knuckles for adjusting)



#### Packing

DW-170: 1pc/box, 8pcs/carton G.W.: 14.7kgs, 1.27'  
DW-171: 1pc/box, 12pcs/carton G.W.: 17kgs, 1.3'

#### Wall mount Bracket

- Firmly fix on solid wall
- Meets VESA standards Mounting spec. provided is 75mm X 75mm
- Adjusting: 1. Swivel left & right total 180°
- 2. LCD monitor swivel 270°
- 3. Pivot upwards & downwards
- Holds LCD Monitor up to 12 Kgs

